



1672 Main St Suite E312
Ramona, CA 92065 USA

Website: www.raindancewatersystems.com

Online Store: www.raindanceh2ostore.com

Ph: 877-788-8387 | Ph: 760-788-8387

sales@raindancewatersystems.com

Iron Max Data Sheet – 18-21” Tank Models

Models:

This Data Sheet covers the RainDance Water Systems line of 18” and 21” Iron Max backwashing filters.

Design:

Built with NSF Certified Components & Filtration Media designed for long-term, reliable performance. Filters include self-cleaning capabilities and high performance filtration media for greatly reduced maintenance.

Specifications:

All RainDance 18-21” Iron Max filters include the following operating parameters:

Power: 120v, 60hz Standard Receptacle

Water Pressure: Minimum 30psi / Maximum 100psi

Water Temperature: Minimum 34F / Maximum 100F (1.1C / 37.7C)

Iron: Maximum 12ppm / mg/L – Ferrous & Ferric

Manganese: Maximum 5ppm / mg/L

Hydrogen Sulfide Gas: Maximum 3ppm / mg/L

Sediment: 3-5 Micron, Nominal


Ports: 1.5” NPT Stainless Steel - Inlet, Outlet, Drain

Options:

Add-ons included with the listed models:

Controller: Electronic controller uses on-board communication to display various system functions with easy read-outs for quick serviceability.

Vacuum Breaker: Prevents tank collapse from negative pressure. Install with a tee fitting on the water line.

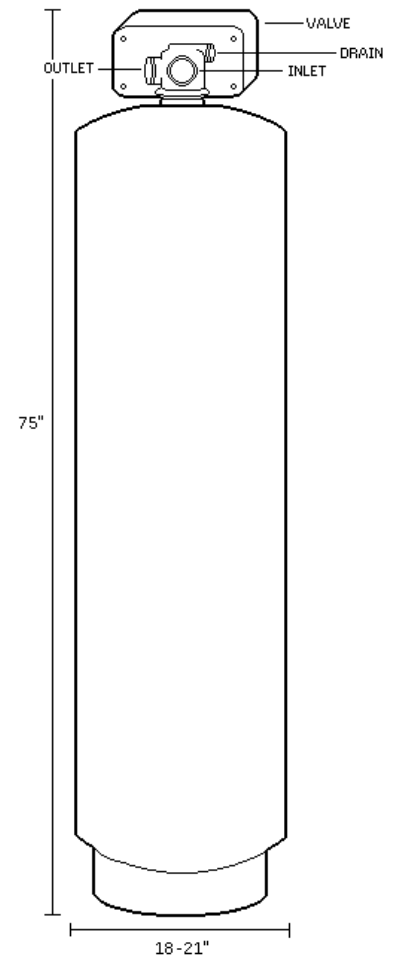

*RainDance Water Systems Products are
Built in the USA by American Workers
utilizing Domestic and Foreign Parts.*